


# microSTATION System Firmware Update


## Update Procedure for Windows users

- ▲ This updater is compatible with Windows XP, Windows Vista and Windows 7. Do not try to run it with Windows 98/Me.
  - ▲ The "KORG USB-MIDI Driver" needs to be installed before the update.
  - ▲ In addition, the "KORG USB-MIDI Driver" needs to be Version 1.12 or later. If the driver installed on your computer is older than Version 1.12 or not understanding the version, install the latest version of the driver before starting the update. For the procedure to install the driver, see the "USB-MIDI Setup Guide(Install the software/Installation in Windows/Installing the KORG USB-MIDI driver)" in the Accessory disc included with the microSTATION. Then, complete the installation of the driver by using the "KORG MIDI Driver Setup Utility".
1. Unzip the microSTATION\_Updater\_101.zip file.
    - ▲ Unzip all the files in the zip file before proceeding to [Step 3]. The updater will not be able to find all the necessary files if they were not unzipped.
  2. Turn on the Power Switch of the microSTATION while holding the [LOCATE] and [REC] keys. This will put in "Version Up Mode". And then connect to a computer using USB cable.
  3. Execute the kmupdate.exe.  
The following window will appear. Push the [Update] button in the window to start the process.

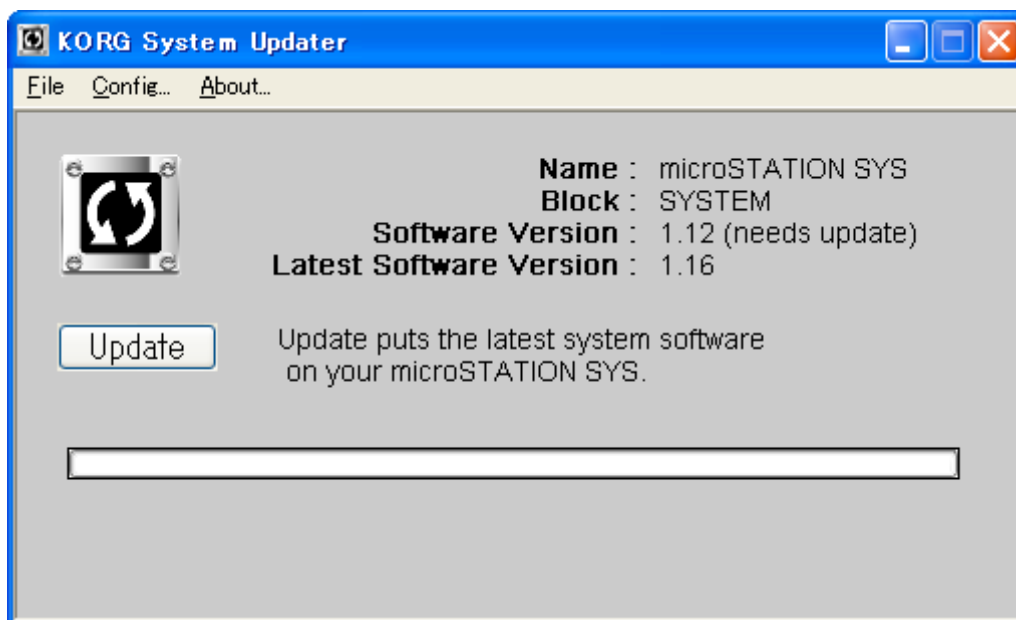


(This is the image of the updater window when the microSTATION version is 1.0.0 Build No.12, and the latest version is 1.0.1 Build No.16)

- ▲ If the following message is shown, the system firmware is already up to date, and no change is needed. In this case simply quit the KORGM System Updater.

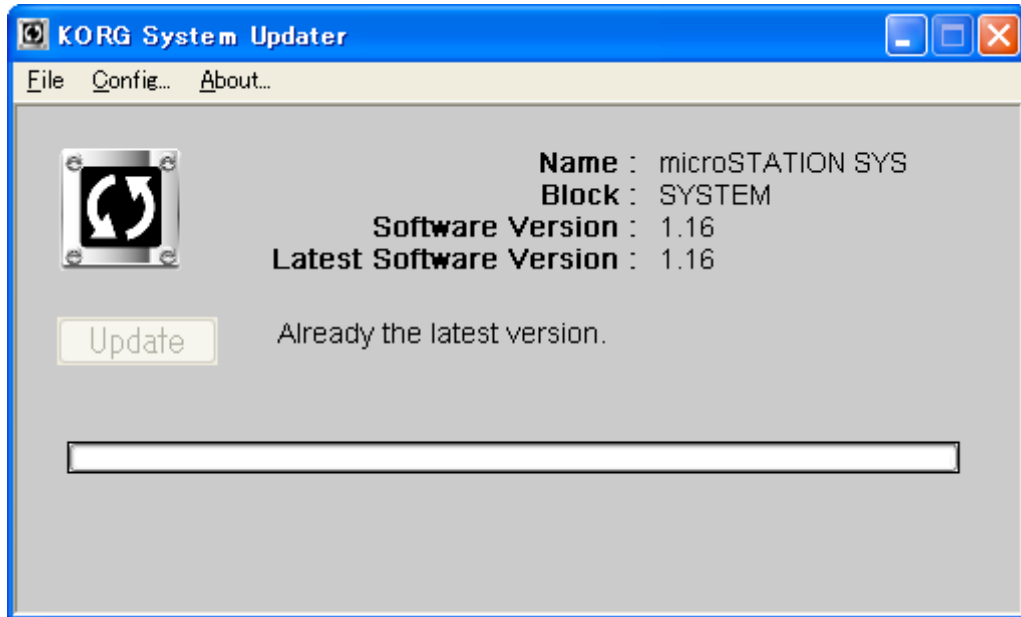


- ▲ If an "Error message" is shown, confirm that the "microSTATION" is connected to the computer properly, the "KORGM USB-MIDI Driver" has already been installed and showing microSTATION, and not "USB audio device", and the driver is Version 1.12 or later.
  - ▲ The updater can't recognize the microSTATION, if [Step2] and [Step3] are not done in the right order.
4. During the updating process, the following window will appear. The whole process will take several minutes to complete.

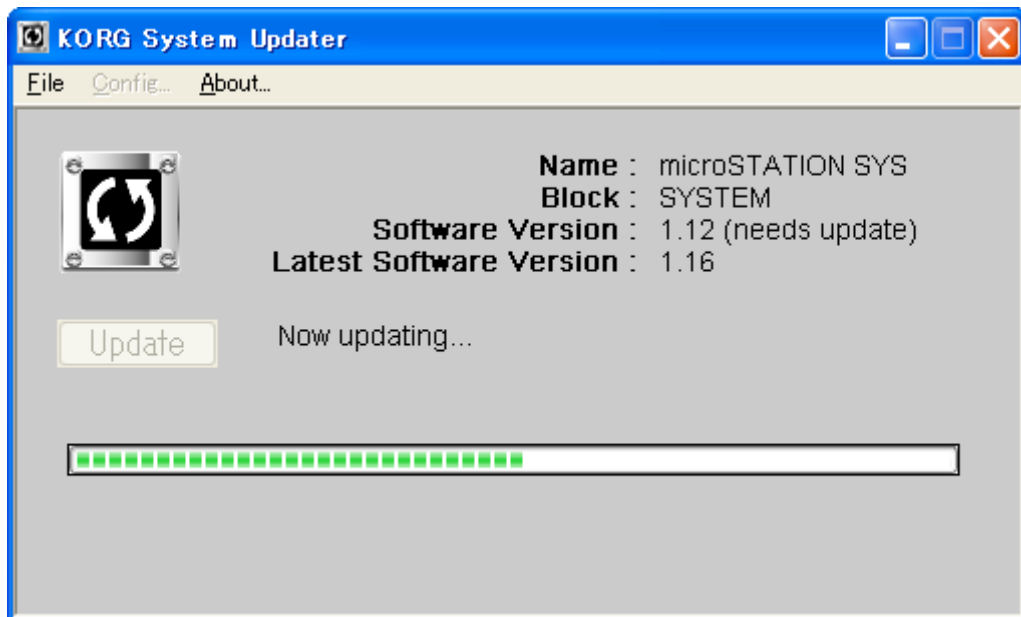

- ▲ **Do not turn off the microSTATION during the update process.**

5. The following message will be shown when the update has successfully completed. This will conclude the entire update procedure.

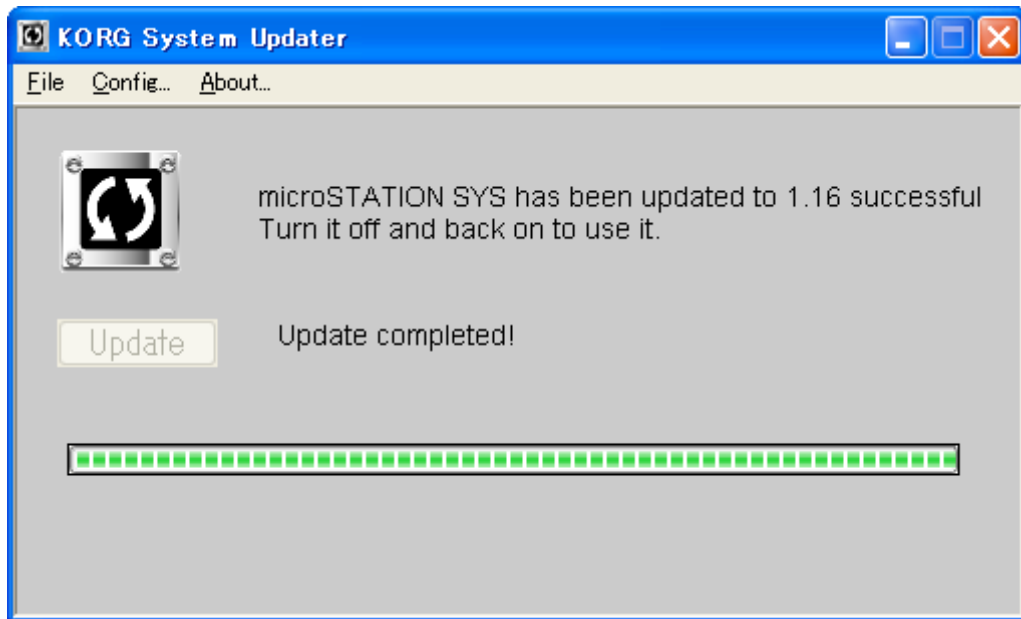

6. Quit the KORGE System Updater, and reboot the microSTATION.